

Icopal Terrassbrunn TG



Terrassbrunn TG is used for drainage of concrete decks with built-in (hidden) bitumen membranes. The drain which is driveable is the only one that meets both the requirements of AMA Hus 11 JSE. 17 and Tätskikts-garantier i Norden AB's guidelines (read more at www.tg-norden.se).

Icopals TG-brunn is of high quality and has a flexible design. Thanks to a new system with variable elevation rings can the drain now simply be adapted to constructions with a wide variety of heights. The new ring system has a new hole pattern that also result in improved drainage.

Description

The drain that is available with both straight outlet and side outlet is made of corrosion-resistant, high-quality metal alloy containing 85% copper (red metallic CC491K). The flange is pre-treated with Icoflux primer.

By combining an inner elevation ring (height 100, 150 or 150 mm) with an outer adjustable 200 mm high elevation ring a variety of combination heights can be achieved. The inner rings can also be used individually. In addition to the above-mentioned dimensions there is a 30 mm high fixed ring that cannot be combined with the outer ring. See options below.




TG-brunn 4 "with straight outlet can also be ordered threaded together with a 300 mm extension pipe.

See complete parts list is on page 2. Unless otherwise noted, accessories are made of the same material as the drain.

For more detailed drawings, see separate documentation.

Installation

Normally the drain is casted into the concrete deck. Intäckningskrage and klämring are mounted in connection with the accession of a dense layer. Surface ring/s and plansil mounted in the superstructure. For further information, see separate installation instructions.

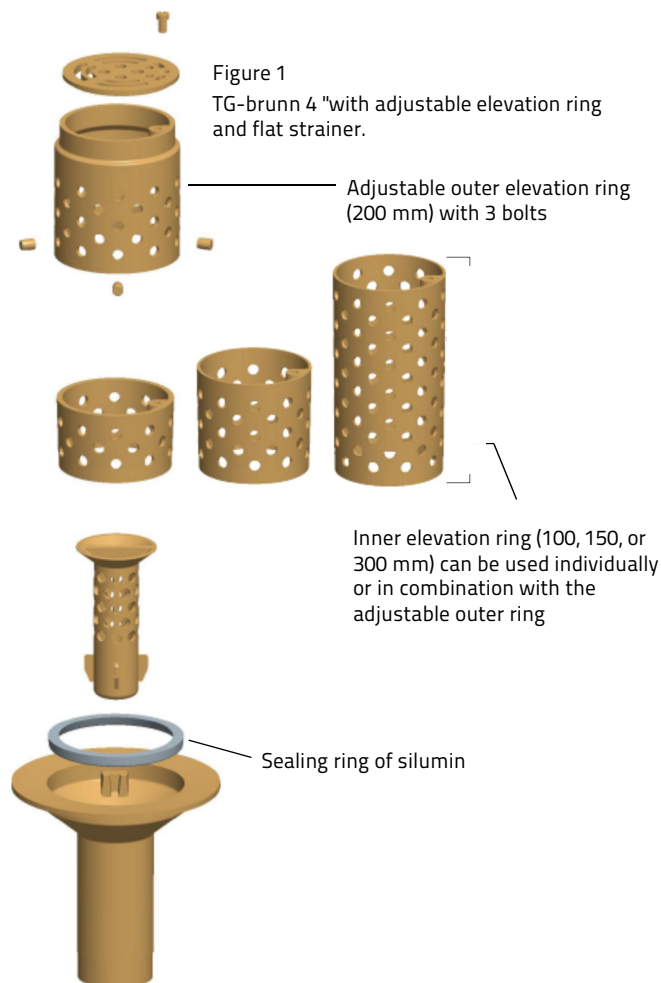

Article list Terrassbrunn TG

Terrassbrunn standard

Article no.	Description
430348	TG-brunn 4" with straight outlet 110 mm
430447	TG-brunn 4" with side outlet 110 mm
430363	TG-brunn 6" with straight outlet 160 mm

Terrassbrunn 4" with threaded outlet and extension tube

Article no.	Description
430349	TG-brunn 4" with threaded outlet
430480	Extension tube 300 mm

Elevation rings

Article no.	Description	Fixed height	Combination height (mm)
430580	Elevation ring 4/6"	30 mm	-
430600	Adjustable outer elevation ring 4/6" 200 mm incl. 3 bolts for fixation to inner ring	-	See below
430632	Adjustable inner elevation ring 4/6" that fits article 430600	100 mm	210, 235, 260
430633		150 mm	210, 235, 260, 280
430636		300 mm	320, 340, 365, 390, 410, 430
430602	Extra bolt	-	-

Other accessories

Article no.	Description
9217	Cape of SBS-bitumen 500 x 500 mm
430504	Sealing ring of silumin
430702	Drivable flat strainer 4/6" incl. screw for fixation in elevation ring
430705	Extra screw to flat strainer
430690	Cleaning strainer 4"
430695	Cleaning strainer 6"
430801	Domed strainer of aluminium, round (fits directly in the drain)



Icopal AB
Box 848, 201 80 Malmö
info.se@icopal.com
www.icopal.se

