


LOAD CAPACITY

Universal Connector 190

ESSVE
GET IT DONE

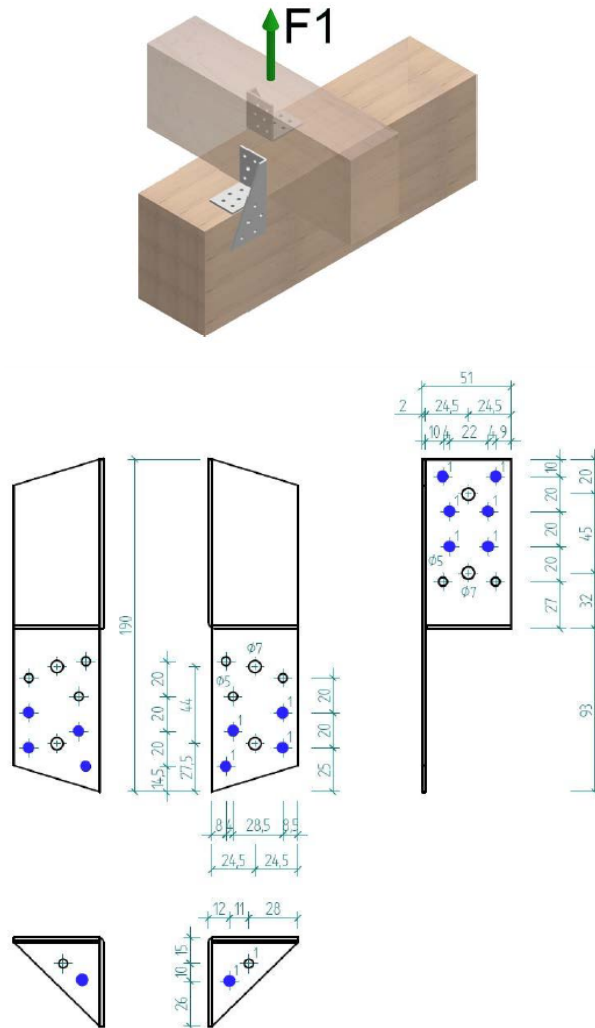

Load Capacity in C24-timber (350 kg/m³) with two (left & right) connectors with 5,0x40mm Anchor Screws

Load direction	Unit	22 anchor screws
F_{up}		Holes: Blue
Characteristic Resistance	[kN]	17,1
Design Resistance (permanent load)	[kN]	7,9
Design Resistance (short term / wind)	[kN]	11,8
Allowable load (permanent)	[kg]	570
Allowable load (short term / wind)	[kg]	860