

## **ENVIRONMENTAL PRODUCT DECLARATION**

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:

Program operator:

Publisher:

Declaration number:

Registration number:

ECO Platform reference number:

Issue date:

Valid to:

Saint-Gobain Sweden AB, Weber

The Norwegian EPD Foundation

The Norwegian EPD Foundation

NEPD-3292-1937-EN

NEPD-3292-1937-EN

-

22.12.2021

22.12.2026

# weber concrete impregnation creme

## Saint-Gobain Sweden AB, Weber



www.epd-norge.no





### **General information**

**Product:** 

weber concrete impregnation creme

Program operator:

The Norwegian EPD Foundation Pb. 5250 Majorstuen, 0303 Oslo Phone: +47 23 08 80 00 e-mail: post@epd-norge.no

**Declaration number:** 

NEPD-3292-1937-EN

**ECO Platform reference number:** 

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR.

NPCR 009:2018 Part B for Technical - Chemical products in the building and construction industry

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

**Declared unit:** 

1 kg weber concrete impregnation creme

Declared unit with option:

A1,A2,A3,A4

Functional unit:

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Individual third party verification of each EPD is not required when the EPD tool is i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPDNorway, and iii) the process is reviewed annualy. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

**Verification of EPD tool:** 

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Anne Rønning, Norsus AS (no signature required)

Owner of the declaration:

Saint-Gobain Sweden AB, Weber Contact person: Anders Anderberg Phone: +46 8 625 6105

 $e\hbox{-}mail: anders.anderberg@weber.se$ 

Manufacturer:

Saint-Gobain Sweden AB, Weber

Place of production:

Saint-Gobain Sweden AB, Weber Box 415 SE-19162 Sollentuna Sweden

Management system:

ISO 9001, ISO 14001

Organisation no:

SE-556241-2592

Issue date: 22.12.2021

Valid to: 22.12.2026

Year of study:

2019

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

**Development and verification of EPD:** 

The declaration has been developed and verified using EPD tool lca.tools ver EPD2020.11, developed by LCA.no AS. The EPD tool is integrated into the company's environmental management system, and has been approved by EPD-Norway

Developer of EPD:

Jenny Knutsson

Reviewer of company-specific input data and EPD:

Helene Wallgren

Approved:

Sign

Håkon Hauan, CEO EPD-Norge



### **Product**

#### **Product description:**

weber concrete impregnation creme is as silane-based, hydrophobic concrete impregnation in thixotropic consistency, intended for both new and old concrete structures in the housing and civil engineering sector. The product meets the conditions according to EN 1504-2. Tested according to guidelines of NT BUILD 515, Edition 1, Hydrophobic impregnation for Concrete - prevents penetration of chlorides - filter effect. The product meets the conditions according to AMA Anläggning 17, LFB.311

#### **Product specification**

The composition of the product is described in the following table:

Materials	%		
Chemicals	100		

#### **Technical data:**

weber concrete impregnation creme is tested and approved according to EN 1504-2.

For further information, see www.se.weber/

#### Market

Nordic and Baltic countries.

Reference service life, product

25 years

Reference service life, building

50 years

## LCA: Calculation rules

#### Declared unit:

1 kg weber concrete impregnation creme

#### **Cut-off criteria:**

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

#### Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

#### Data quality:

Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.


Materials	Source	Data quality	Year
Packaging	ecoinvent 3.4	Database	2017
Chemicals	Saint-Gobain Sweden AB	Database	2021



#### System boundary:

All processes from raw material extraction to product from the factory gate are included in the analysis (A1-A3). In addition, transportation to a central warehouse placed in accordance with guidelines issued by the EPD Norway (A4) is included.

The flow chart below illustrates the system boundaries for the A1 to A3 part of the analysis.

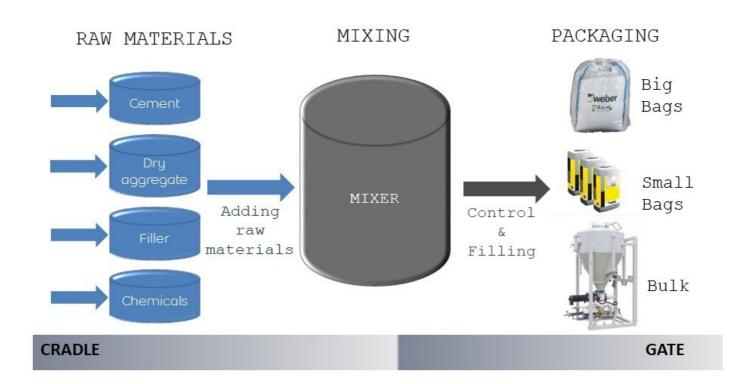

#### Additional technical information:

The remaining liquid is not classified as hazardous waste. Cured material is inactive and not classified as hazardous waste and may be disposed as construction waste to disposal or recycling.

The packaging properly emptied is not classified as hazardous waste.



## LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

#### Transport from production place to user (A4)

Туре	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (I/t)
Truck	55,0 %	Truck, lorry over 32 tonnes, EURO 5	300	0,022823	l/tkm	6,85
Railway					l/tkm	
Boat					l/tkm	
Other Transportation					l/tkm	

Additional A4 information	Unit/Range	Value
Lilleström, Norway (truck / truck to jobsite: 798 km)	Multiplication factor GWP/A4	1 86
Karlslunde, Denmark (truck / truck to jobsite: 960 km)	Multiplication factor GWP/A4	7151
Helsinki, Finland (truck / truck to jobsite: 800 km)	Multiplication factor GWP/A4	18/

#### Assembly (A5)

, , , ,		
	Unit	Value
Auxiliary	kg	
Water consumption	m <sup>3</sup>	
Electricity consumption	kWh	
Other energy carriers	MJ	
Material loss	kg	
Output materials fr ste treatment	kg	
Dust in the air	kg	
VOC emissions	kg	

#### Maintenance (B2)/Repair (B3)

maniferior (DZ) respan (DO)		
	Unit	Value
Maintenance cycle*	O'CO	
Auxiliary	char.	
Other resources	4//0	)_
Water consumption	Scenario	3. 9k
Electricity consumption	kWh	.16
Other energy carriers	MJ	
Material loss	kg	
VOC emissions	kg	

### Operational energy (B6) and water consumption (B7)

	Unit	Value
Water consumption	m <sup>3</sup>	
Electricity consumption	kWh	
Other energy carriers	MJ	
Power output of equipment	KW	

## Use (B1)

•	Unit	Value

### Replacement (B4)/Refurbishment (B5)

	Unit	Value
Replacement cycle*		
Electricity consumption	kWh	
Replacement of worn parts		

\* Described above if relevant

PrA1-A4 are not

·	Unit	Value
Hazardous waste disposed	kg	
Hazardous waste disposed Collected as mixed construction was	kg	
Reuse	kg	
Recycling	_	
Energy recovery		
To landfill	kg	

### Transport to waste processing (C2)

Туре	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (I/t)
Truck					I/tkm	
Railway					I/tkm	
Boat					I/tkm	
Other Transportation					I/tkm	



## **LCA: Results**

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

## System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage			instal	ruction lation age	User stage							End of	life stage	•	Beyond the system bondaries	
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational wafer use	De- construction demolition	Transport	W aste processing	Disposal	Reuse-Recovery- Recycling- potential
A1	A2	A3	A4	A5	B1	B2	В3	В4	В5	В6	В7	C1	C2	C3	C4	. D
Х	Х	Х	Х	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	. MND

## **Environmental impact**

Parameter	Unit	A1-A3	A4
GWP	kg CO <sub>2</sub> -eq	2,64E+00	2,62E-02
ODP	kg CFC11 -eq	5,29E-08	5,10E-09
POCP	kg C <sub>2</sub> H <sub>4</sub> -eq	1,31E-03	4,23E-06
AP	kg SO <sub>2</sub> -eq	1,19E-02	8,51E-05
EP	kg PO <sub>4</sub> <sup>3-</sup> -eq	1,54E-03	1,43E-05
ADPM	kg Sb -eq	1,42E-05	5,91E-08
ADPE	MJ	5,69E+01	4,11E-01

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer, POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

"Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009"

\*INA Indicator Not Assessed



#### Resource use

Parameter	Unit	A1-A3	A4
RPEE	MJ	1,48E+01	7,42E-03
RPEM	MJ	0,00E+00	0,00E+00
TPE	MJ	1,48E+01	7,42E-03
NRPE	MJ	3,81E+01	4,23E-01
NRPM	MJ	2,41E+01	0,00E+00
TRPE	MJ	6,23E+01	4,23E-01
SM	kg	0,00E+00	0,00E+00
RSF	MJ	4,77E-05	0,00E+00
NRSF	MJ	5,26E-04	0,00E+00
W	m <sup>3</sup>	6,39E-02	9,98E-05

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

"Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009"

\*INA Indicator Not Assessed

#### End of life - Waste

Parameter	Unit	A1-A3	A4
HW	kg	3,81E-04	2,25E-07
NHW	kg	3,05E-01	3,84E-02
RW	kg	INA*	INA*

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

"Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009"

\*INA Indicator Not Assessed

### End of life - Output flow

Parameter	Unit	A1-A3	A4
CR	kg	0,00E+00	0,00E+00
MR	kg	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00
EEE	MJ	INA*	INA*
ETE	MJ	INA*	INA*

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

"Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009"

\*INA Indicator Not Assessed



## **Additional Norwegian requirements**

#### Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

#### **Dangerous substances**

The product contains no substances given by the REACH Candidate list or the Norwegian priority list.

#### Indoor environment

The product has no impact on the indoor environment.

## **Bibliography**

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012+A1:2013 Environmental product declaration - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works. Core rules for environmental product declarations of construction products.

ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

lversen et al., (2018) eEPD v3.0 - Background information for EPD generator system, LCA.no report number 04.18

Iversen et al., (2019) EPD generator for Saint-Gobain Weber and Scanspac - Background information and LCA data, LCA.no report number 05.18

NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.

NPCR 009 Part B for technical-chemical products. Ver. 1.0 June 2018, EPD-Norge.

epd-norge.no The Norwegian EPD Foundation	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo,Norway	Phone: e-mail: web:	+47 23 08 80 00 post@epd-norge.no www.epd-norge.no
<b>Sweber</b> SAINT-GOBAIN	Owner of the declaration	Phone:	+46 8 625 6105
	Saint-Gobain Sweden AB, Weber	e-mail:	anders.anderberg@weber.se
	Box 415 SE-19162 Sollentuna	web:	www.weber.se
LCA,	Author of the Life Cycle Assessment	Phone:	+47 916 50 916
	LCA.no AS	e-mail:	post@lca.no
	Dokka 1C 1671 Kråkerøy	web:	www.lca.no
LCA,	<b>Developer of EPD generator</b>	Phone:	+47 916 50 916
	LCA.no AS	e-mail:	post@lca.no
	Dokka 1C,1671 Kråkerøy	web:	www.lca.no